

Pratt Safety Systems Product Range

The trusted brand for safety solutions



For over 40 years Pratt Safety Systems has been supplying Australian industry with quality site safety and environmental protection products which comply with Australian and international standards

With the ever increasing focus on workplace and environmental safety, Pratt Safety Systems has the knowledge and expertise to find solutions to any of our customers needs, and we are committed to on-going product development to ensure our customers have access to the latest technology available.

Dangerous Goods Storage Cabinets	4
Flammable Liquid Storage Cabinets	6
Corrosive Storage Cabinets - Metal	8
Corrosive Storage Cabinets - Polyethylene	9
Toxic Storage Cabinets	10
Oxidizing Agent Storage Cabinets	11
Organic Peroxide Storage Cabinets	12
Class 4 Dangerous Goods Cabinets	13
Gas Cylinder & Aerosol Storage Cages	14
Emergency Showers & Eye Wash Stations	16
Combination Showers & Eye Wash Stations	18
Eye Wash Stations	20
Laboratory Units	20
Eye-Face Wash Stations	21
Safety Showers	21
Portable Units	22
Multi Spray Units	23
Gravity Shower	23
Accessories	24
Product Specifications Overview	25
Combination Shower Spare Parts	26
Eye & Eye Wash Spare Parts	28



Spill Containment	30
Drum Spill Containment	32
IBC Spill Pallets	34
Other Spill Products	36
Spill Collectors	37
Spill Trays & Drum Funnels	38
Utility Spill Trays	40
Drum Rack Systems	
Drain Seals & Plugs	
Accessories	43
Ultra Sidewinder	44
Smoke Stops	46

For more information, contact Pratt Safety Customer Service on 1300 133 226 or visit www.prattsafety.com.au



Features of New Range



Recessed Door Handle with Key Lock



Sequential Self Closing Doors



Self Latching Door



Heavy Duty Packaging

Pratt Safety Systems is proud to introduce our new range of Indoor Dangerous Goods Storage Cabinets with new and updated features.

Pratt Safety Systems has been manufacturing and distributing our cabinets throughout Australia and the Pacific region for over 30 years. Pratt Safety was the first company to introduce these cabinets into Australia and has maintained a leading standard of products and service.

All of our cabinets are designed and manufactured to comply with all of the relevant Australian and New Zealand Standards. Refer to the respective Standards for further specifications and conditions of use.

Features and Benefits

New Features

• Heavy Duty Packaging

The unique fully enclosed heavy duty honeycomb core cardboard packaging is mounted on a custom made wooden pallet, providing greater protection of cabinets during storage and transport.

• Powder Coated Paint Finish

Internal and external powder coated finish for improved chemical resistance.

Recessed Handle

New recessed handle with key lock to eliminate potential damage from heavy knocks.

Keyed Alike

2 Keys supplied with each cabinet. (Cabinets with locking handles only)

Self Latching Door

Spring loaded 3 point self latching door mechanism for fault free latching action.

Slide Control Arm

All single door cabinets now include a slide control arm to prevent the door from being over extended.

General Structure

• 50mm Vent Bungs

Fitted into side walls for venting of cabinets where required. Also includes a proven flash arrester in each vent with sealed enclosure in cavity between walls. Each vent is supplied with resealable metal caps.

• Double Steel Walls

Constructed using 1.2mm thick, double steel walls with 40mm air gap between walls to provide thermal insulation.

150mm Deep Liquid Tight Sump

For containment of leakage or spillage.

Static Earthing Connection

Now also including earthing wire with each cabinet to help reduce the potential buildup of static electricity, a known source of ignition.

Classification Labels

All appropriate class labels, capacity labels, identification and instruction labels are applied to each cabinet.

Shelves

• Heavy Duty Perforated Steel

1.6mm thick perforated galvanised steel shelves provide added strength and free air movement within the cabinet (All shelves are pre-fitted to cabinets and additional shelves are available if required).

Fully Adjustable Shelves

90mm shelving increments for large cabinets and 45mm for medium and small cabinets.

Doors

Self Closing Doors

All two door cabinets incorporate Pratt's unique and improved sequential self-closing door action, providing hands free closing and ensures doors close in the correct sequence.

Hydraulic Door Closures

With speed control adjustment for a gentle closing action.

Continuous Piano Hinge

Continuous piano hinges for reliability of action.

Rounded Corners

All doors have rounded corners for added safety.



Flammable Liquid Storage Cabinets

Pratt Indoor Flammable Liquid Storage Cabinets comply with the Australian Standard AS 1940 "The Storage and Handling of Flammable and Combustible Liquids". This range of cabinets is for the storage of flammable or combustible liquids as classified by the United Nations criteria and the ADG Code for Dangerous Goods.

These include flammable liquids such as Paints, Solvents, Petrol, Thinners, Kerosene, Turpentine, White Spirits, Alcohol and Ethanol.

Also combustible liquids such as Diesel, Linseed Oil and Pine Oil.





5516AS



5517AS



5535AS



5530AS



5545AS



5560AS



5560ASE



5555VS



5590AS

Model	Capacity	Doors	Shelves	Extra Shelf	Ex	ternal (mi	n)	In	ternal (mn	n)
			Inc. Base Level		Height	Width	Depth	Height	Width	Depth
5516AS	30L	1	1	5517-29S	770	515	465	525	420	370
5517AS	60L	1	2	5517-29S	1065	515	465	820	420	370
5535AS	100L	2	1	5535-29S	770	935	620	495	840	530
5530AS	160L	2	2	5545-29S	1295	1115	500	1015	1020	415
5545AS	250L	2	3	5545-29S	1825	1115	500	1545	1020	415
5560AS	350L	2	3	5560-29S	1825	1440	585	1545	1350	495
5560ASE	350L	1	3	5560E29S	1825	865	865	1580	770	775
5555VS	205L	1	Roller Set	-	1825	865	865	1580	770	775
5590AS	425L	2	3	5590-29S	1825	1115	865	1545	1015	775

Note: 1. For all two door cabinets, the internal height is taken from top of sump sill/bottom shelf to the sequential chassis assembly.

2. For all single door cabinets, the internal height is taken from the top of the sump sill/bottom shelf to the ceiling.

3. For total external width measurement, add 6mm per vent bung for tight clearance locations.



Corrosive Storage Cabinets - Metal

Pratt Indoor Corrosive Substance Storage Cabinets comply with AS 3780 "The Storage and Handling of Corrosive Substances".

This range of cabinets is for the storage of corrosive substances in liquid or solid form as classified by the United Nations criteria and the ADG Code for Dangerous Goods. These include chemicals such as Acids, Alkalis, Caustics, Sodium Hydroxide Solution and Hypochlorite Solution.

Special Features:

- Cabinet doors are fitted with an all stainless steel piano hinge for added protection.
- ✓ Internal door opening latch (as required by the Standards).
- ▲ Each shelf is supplied with plastic spill trays to contain small spills and leakage.
- Additional powder coating of the shelving and closing assembly for added protection.



5516ASPH



5517ASPH



5535ASPH



5530ASPH



5545ASPH



5560ASPH



5590ASPH

Please Note: These cabinets are designed for the safe storage of corrosives in sealed and closed containers. Good housekeeping practices are essential to ensure long service life.

Model	Capacity	Doors	Shelves	Extra Shelf	Trays	Extra Tray	Ext	ternal (m	m)	Int	ernal (m	m)
			Inc. Base Level				Height	Width	Depth	Height	Width	Depth
5516ASPH	30kg or L*	1	1	5517PH-29S	1	5517-29TS	770	515	465	525	420	370
5517ASPH	60kg or L*	1	2	5517PH-29S	2	5517-29TS	1065	515	465	820	420	370
5535ASPH	100kg or L*	2	1	5535PH-29S	1	5535-29TS	770	935	620	495	840	530
5530ASPH	160kg or L*	2	2	5545PH-29S	2	5545-29TS	1295	1115	500	1015	1020	415
5545ASPH	250kg or L*	2	3	5545PH-29S	3	5545-29TS	1825	1115	500	1545	1020	415
5560ASPH	350kg or L*	2	3	5560PH-29S	3 3	5545-29TS 5517-29TS	1825	1440	585	1545	1350	495
5590ASPH	425kg or L*	2	3	5590PH-29S	6	5545-29TS	1825	1115	865	1545	1015	775

^{*} AS 3780 specifies a maximum of 50kg or L for Packaging Group I Corrosive Substances and 250kg or L for Packaging Group II.

Note: 1. For all two door cabinets, the internal height taken from top of sump sill to the sequential chassis assembly.

^{2.} For all single door cabinets, the internal height is taken from the top of the sump sill to the ceiling.

^{3.} For total external width measurement, add 6mm per vent bung for tight clearance locations.



Corrosive Storage Cabinets - Polyethylene







5512PSPH

5516PSPH

5517PSPH

Pratt Indoor Polyethylene Corrosive Substance Storage Cabinets also comply with AS 3780.

They are manufactured from polyethylene plastic material which provides superior resistance for the storage of corrosive chemicals. These include chemicals such as Sulphuric Acid, Hydrochloric Acid, Nitric Acid and other substances highly aggressive to metal.



5540PSPH



Special Features:

- Constructed with 19mm thick polyethylene plastic sheet material including frame, door/s and shelves.
- ▲ Acid resistant liquid tight seal in all panel joints.
- ▲ Self-closing door/s with internal door opening latch.
- ▲ 150mm deep liquid tight sump.
- ✓ Self latching handle with key lock.
- Venting kit supplied with all models (may be fitted at installation if required).
- ▲ Some models feature separate compartments, permitting the storage of both acids and alkalis.



5530PSPH



5545PSPH

Model	Capacity	Doors	Shelves	Extra Shelf	Ex	cternal (mi	m)	In	ternal (mr	n)
			Inc. Base Level		Height	Width	Depth	Height	Width	Depth
5512PSPH	20kg or L*	1	1	5512P-29	600	460	466	410	420	420
5516PSPH	40kg or L*	1	1	5516P-29	770	600	466	580	560	420
5517PSPH	60kg or L*	1	2	5516P-29	1150	600	466	960	560	420
5535PSPH	100kg or L*	2	1	5535P-29	770	880	606	580	840	560
5540PSPH	110kg or L*	2	2	5545P-29	770	1000	600	580	2x470	565
5530PSPH	160kg or L*	2	4	5545P-29	1150	1000	600	960	2x470	565
5545PSPH	250kg or L*	2	6	5545P-29	1550	1000	600	1360	2x470	565

^{*}AS 3780 specifies a maximum of 50kg or L for Packaging Group I Corrosive Substances and 250kg or L for Packaging Group II. **Note: 1.** For all models, the internal height is taken from the top of the sump to the ceiling.



Toxic Storage Cabinets

Pratt Indoor Toxic Substance Storage Cabinets comply with the Australian & New Zealand Standard AS/NZS 4452 "The Storage and Handling of Toxic Substances".

This range of cabinets is for the storage of toxic substances in liquid or solid form as classified by the United Nations criteria and the ADG Code for Dangerous Goods.

These include chemicals such as Alkaloids. Arsenic, Aniline, Cyanides, Mercury, Phenol -Solid and Trichloroethylene.



5516AST



5517AST





5530AST



5545AST



5560AST

Model	Capacity	Doors	Shelves	Extra Shelf	E	cternal (mr	n)	In	ternal (mr	n)
			Inc. Base Level		Height	Width	Depth	Height	Width	Depth
5516AST	30L	1	1	5517-29S	770	515	465	525	420	370
5517AST	60L	1	2	5517-29S	1065	515	465	820	420	370
5535AST	100L	2	1	5535-29S	770	935	620	495	840	530
5530AST	160L	2	2	5545-29S	1295	1115	500	1015	1020	415
5545AST	250L	2	3	5545-29S	1825	1115	500	1545	1020	415
5560AST	250L	2	3	5560-29S	1825	1440	585	1545	1350	495

^{*} AS/NZS 4452 specifies a maximum of 25kg or L for Packaging Group I and 50kg or L for Packaging Group II Toxic Substances. **Note: 1.** For all two door cabinets, the internal height taken from top of sump sill to the sequential chassis assembly.

^{2.} For all single door cabinets, the internal height is taken from the top of the sump sill to the ceiling.

^{3.} For total external width measurement, add 6mm per vent bung for tight clearance locations.



Oxidizing Agent Storage Cabinets



This range of cabinets is for the storage of Oxidizing Agents in liquid or solid form as classified by the United Nations criteria and the ADG Code for Dangerous Goods.

These include chemicals such as Hypochloriteinorganic, Hydrogen Peroxide, Perchloritesinorganic and Potassium Nitrate.

Special Features:

- Cabinets are fitted with a non latching door/s.
- ✓ Includes recessed handle without key lock facility.
- ✓ Includes magnetic catch that will release in the event of a build-up of pressure within the cabinet (as required by this Standard).



5516A0A



5517A0A



5535A0A



5530A0A



5545A0A

	Model	Capacity	Doors	Shelves	Extra Shelf	Ex	ternal (mi	n)	In	ternal (mr	n)
ı				Inc. Base Level		Height	Width	Depth	Height	Width	Depth
	5516A0A	30kg or L*	1	1	5517-29S	770	515	465	525	420	370
	5517A0A	60kg or L*	1	2	5517-29S	1065	515	465	820	420	370
	5535A0A	100kg or L*	2	1	5535-29S	770	935	620	495	840	530
	5530A0A	160kg or L*	2	2	5545-29S	1295	1115	500	1015	1020	415
	5545A0A	250kg or L*	2	3	5545-29S	1825	1115	500	1545	1020	415

Note: 1. For all two door cabinets, the internal height taken from top of sump sill to the sequential chassis assembly.

2. For all single door cabinets, the internal height is taken from the top of the sump sill to the ceiling.

^{3.} For total external width measurement, add 6mm per vent bung for tight clearance locations.



Organic Peroxide Storage Cabinets



This range of cabinets is for the storage of organic peroxides in liquid or solid form as classified by the United Nations criteria and the ADG Code for Dangerous Goods.

These include chemicals such as Acetyl Acetone Peroxide, Methyl Ethyl Ketone Peroxides and Dibenzoyl Peroxide.

Special Features:

- Cabinets are fitted with a non latching door/s.
- ✓ Includes recessed handle without key lock facility.
- ✓ Includes magnetic catch that will release in the event of a build-up of pressure within the cabinet (as required by this Standard).







5517AP0



5535AP0



5530AP0



5545AP0

Model	Capacity	Doors	Shelves	Extra Shelf	Ex	ternal (mi	n)	In	ternal (mr	n)
			Inc. Base Level		Height	Width	Depth	Height	Width	Depth
5516AP0	30kg or L*	1	1	5517-29S	770	515	465	525	420	370
5517AP0	60kg or L*	1	2	5517-29S	1065	515	465	820	420	370
5535AP0	100kg or L*	2	1	5535-29S	770	935	620	495	840	530
5530AP0	100kg or L*	2	2	5545-29S	1295	1115	500	1015	1020	415
5545AP0	100kg or L*	2	3	5545-29S	1825	1115	500	1545	1020	415

^{*} AS 2714 specifies a maximum of 50kg or L for Type B Organic Peroxides

Note: 1. For all two door cabinets, the internal height taken from top of sump sill to the sequential chassis assembly.

^{2.} For all single door cabinets, the internal height is taken from the top of the sump sill to the ceiling.

^{3.} For total external width measurement, add 6mm per vent bung for tight clearance locations.







Class 4 Dangerous Goods Cabinets





5516AC4

5517AC4

Pratt Indoor Class 4 Storage Cabinets comply with the new Standard AS/NZS 5026 "The Storage and Handling of Class 4 Dangerous Goods".

This range of cabinets is for the storage of Class 4 chemicals in liquid or solid form as classified by the United Nations criteria and the ADG Code for Dangerous Goods. Please refer to the Standard.

These include the following divisions:

- Flammable Solids
- Spontaneously Combustible
- Dangerous When Wet

Special Features:

- ▲ Cabinets are fitted with a non latching door/s.
- ▲ Includes recessed handle without key lock facility.
- ✓ Includes magnetic catch that will release in the event of a build-up of pressure within the cabinet (as required by this Standard).



5535AC4



5530AC4



5545AC4

New Range of Storage Cabinets

Model	Capacity	Doors	Shelves	Extra Shelf	E	cternal (mi	nl	In	ternal (mr	n)
			Inc. Base Level		Height	Width	Depth	Height	Width	Depth
5516AC4	30kg or L*	1	1	5517-29S	770	515	465	525	420	370
5517AC4	60kg or L*	1	2	5517-29S	1065	515	465	820	420	370
5535AC4	100kg or L*	2	1	5535-29S	770	935	620	495	840	530
5530AC4	160kg or L*	2	2	5545-29S	1295	1115	500	1015	1020	415
5545AC4	250kg or L*	2	3	5545-29S	1825	1115	500	1545	1020	415

^{*} AS/NZS 5026 specifies a maximum of 25kg or L for Category A, 50kg or L of Category B or 100kg or L of Category C, Class 4 Chemicals. Other capacity limitations do apply. Refer to the Standard for further details.

Note: 1. For all two door cabinets, the internal height taken from top of sump sill to the sequential chassis assembly.

^{2.} For all single door cabinets, the internal height is taken from the top of the sump sill to the ceiling.

^{3.} For total external width measurement, add 6mm per vent bung for tight clearance locations.

Gas Cylinder & Aerosol Storage Cages

A secure and cost effective solution for safely storing a wide range of gas cylinders

Pratt Safety Systems offers a comprehensive range of Gas Cylinder Storage Cages to suit most storage requirements. Whether it is for storing Aerosol Cans, Gas Cylinders, Forklift Gas Cylinders or a mixture, Pratt Safety Systems has a solution for you.

All Pratt Gas Cylinder Storage Cages comply with the requirements of Australian Standard AS 4332 and AS/NZS 1596. Refer to these standards for more specific storage requirements and compliance.

Pratt Safety Systems has a reputation for also providing a comprehensive range of high quality Dangerous Goods Chemical Storage Cabinets complying with all relevant Australian Standards. Ideal for storing tall sized cylinders, forklift cylinders and aerosols.



Features include:

- Yellow powder coated steel construction, suitable for outdoor environments.
- Solid steel roof and floor, with steel mesh sides to provide ventilation.
- All wall panels and doors are made of welded steel mesh within a sturdy steel frame for added strength.
- Strong magnetic door catches to hold doors closed and an eye lug for a padlock.
- Raised support legs with pre-drilled feet which can be permanently fixed to the ground. (Recommended)

- Capable of being moved by forklift for relocation if required. Note – only when cage is empty of cylinders.
- Available in a range of configurations for tall gas cylinders and forklift gas cylinders.
- Tall forklift cylinder storage cages include shelf to provide storage on two levels.
- Restraining chain to prevent cylinders from falling.
- Supplied fully assembled for immediate installation and use.
- Includes appropriate safety signs.



PSGC1A



PSGC2A



PSGC4F



PSGC8A



PSGC8F



PSGC9V



PSGC18V



PSGC8F9V



PSGC16A



PSGC16F

Model	Capacity	Storage Levels	Height (mm)	Width (mm)	Depth (mm)
PSGC1A	up to 42 Aerosol Cans	1	360	560	490
PSGC2A	up to 84 Aerosol Cans	2	660	560	490
PSGC4A	up to 200 Aerosol Cans	2	990	780	760
PSGC8A	up to 400 Aerosol Cans	4	1920	780	760
PSGC16A	up to 800 Aerosol Cans	4	1920	1520	760
PSGC4F	4 Forklift Cylinders	1	990	780	760
PSGC8F	8 Forklift Cylinders	2	1920	780	760
PSGC16F	16 Forklift Cylinders	2	1920	1520	760
PSGC9V	9 G-sized Cylinders	1	1920	780	760
PSGC18V	18 G-sized Cylinders	1	1920	1520	760
PSGC8F9V	8 Forklift/ 9 G-sized Cylinders	3	1920	1520	760

Features include:

- Comprehensive range of models
 To suit wide variety of applications.
- Structural components made of 304 stainless steel For strength and durability.
- 316 stainless steel stay-open valves
 For dependable operation and performance.
- Shower head made of AES plastic or optional 316 stainless steel

With a unique conical water pattern to gently deliver large volumes of water ensuring complete decontamination.

• Shower flow control regulator

This assists to provide simultaneous flow between shower and eyewash.

• Interchangeable nozzles

For converting from an eye wash to an eye-face wash.



Features



Deluge Plastic Shower Head



Deluge Stainless Steel Shower Head



Aerostream Triple Nozzle (Aerated)



Aerostream Single Nozzle (Aerated)

Pratt Emergency Showers & Eye Wash Stations are made of high quality stainless steel & durable plastic materials for a long & dependable life.

With a wide range including safety deluge showers, eyewashes, eye/face washes, portable, hand held and combination units, Pratt Safety Systems can provide you with strong and reliable equipment for any workplace requirements. You have a peace-of-mind knowing that you're providing your employees with the best in initial first aid treatment for chemical burns and injuries.

Whether manufacturing, handling or storing chemicals, it is essential to have the right emergency safety equipment available. Emergency Showers & Eye Wash Stations are recommended by Medical Practitioners, Standards and Workplace Regulations.

All Pratt Emergency Showers and Eye Wash Stations designed and manufactured to comply and exceed the requirements of Australian Standard AS4775. This also makes them compliant to American ANSI Z358.1 Standards.

Aerostream Technology

Pratt's Eye-Face Wash and Eye Wash Nozzles deliver a gentle cascade of aerated water to rinse away contaminants without further damaging delicate eye and skin tissue.

- The Eye/Face Wash nozzle (top right) includes 3 aerators with a self closing dust cover. This acts as a deflector creating a sheet of aerated fluid which covers the whole face and eyes together. A nozzle is positioned on each side to provide full facial coverage.
- The Eye Wash nozzle (bottom right) includes
 1 aerator with a protective dust cover. This
 provides a stream of aerated fluid which is
 directed at the eyes for maximum irrigation.
 A nozzle is positioned on each side to provide
 full coverage to both eyes.
- Note that the nozzles are interchangeable if required, as the base has the same mounting connections.



Combination Showers & Eye Wash Stations

Convenience of one unit incorporating both a deluge shower and with an eye or eye-face wash with only one water supply connection required.

Pratt Combination Shower and Eye Wash or Eye-Face Wash Stations, combine all of the features and benefits of the individual showers and eye washes in a single stand alone unit. Only one fluid supply connection is required. These are our most popular 9 models offering a comprehensive selection of 9 models in different configurations including eye wash or eye-face wash, with or without bowl and with or without foot treadle operation.



SE607

*Signs not included, optional extra

316 Stainless Steel Combination Shower & Eye-Face Wash Station

This new model, based on the popular SE607, is constructed primarily using 316 grade stainless steel. This higher grade material provides greater corrosion resistance and a more durable shower unit, ideal for marine and harsh chemical environments. This model retains the AES plastic triple aerated eye-face wash nozzle assemblies to provide the optimum facial and eye irrigation.



SE607T316*



SE603* SE612

SE675

Shower Flow Control Regulator

All Pratt Combination Shower Units are fitted with a flow control regulator, which limits the flow output to 90LPM. This ensures the shower will exceed the minimum required flow rate and allow the eye wash to operate simultaneously as required by the Standards.

Adjustable Eye Wash Flow Control

All Pratt Combination, Eye-Face Wash and Eye Wash Stations incorporate an adjustable flow control. Other than model SE620, all units include an individual flow adjustment screw, located in the mounting base, which allows for the fine tuning of the flow output. Model SE620 features a central adjustable flow control, due to the twin nozzle design.



This new model features all stainless steel construction primarily using 304 grade material with some further 316 grade components. This shower unit is designed for harsh conditions where brass and plastic materials are not appropriate or where full stainless steel construction is preferred. Includes a new dual soft stream non aerated eye-face wash assembly.

SE685

304 stainless steel construction including:

▲ Stanchion, bowl assembly, eye-face wash nozzle, pull rod & treadle.

316 stainless steel components including:

Shower head, ball valves and other connection fittings.



SE620

Eye Wash Stations

Pratt Eye Wash Stations provide a soft flowing, single stream of aerated fluid to the eyes.

Pratt Eye Wash Stations are available in wall or pedestal mounted units, with or without bowl assembly, and with or without foot treadle activation. Each nozzle has a flip off dust cover.

Stainless steel construction provides superior long-life and reliability.







Laboratory Units

Even when working with small doses of dangerous substances, such as in a laboratory, a spill or splash could still cause a serious injury.

Pratt's Laboratory Eye Washes provide laboratory practitioners swift and effective first aid treatment for chemical injuries and burns.



Eye-Face Wash Stations

Pratt Eye-Face Wash
Stations provide a broad
soft flowing stream of
aerated fluid coverage
to the face and eyes.

This is critical, especially where severe irritant or corrosive chemicals are involved.

The eye-face wash nozzles feature three aerators and a self closing dust cover which further spreads the fluid stream for full facial coverage. Available in wall or pedestal mounted, and with or without a bowl assembly. Either version can also be provided with an optional foot treadle activation.











Pratt Safety Showers rapidly remove contaminants from the body with a deluge of flushing fluid.

The shower head features an impeller which creates a swirling action of the flushing fluid to ensure whole body coverage. The shower head delivers a large volume flushing fluid spread evenly in a precise pattern and controlled flow rate.



Portable Units

With Pratt's Portable Units, you can have a safe workplace no matter where you are.

These portable units provide immediate on site water first aid treatment and are ideal for worksites without plumbing capabilities, as well as for fire and emergency teams, vehicles carrying dangerous substances and those working in remote places such as mining, agriculture and construction.



For more information, contact Pratt Safety Customer Service on 1300 133 226 or visit www.prattsafety.com.au



SE5000

Gravity Fed Portable Eye Wash Full Capacity of 35L



SE5050

Gravity Fed Portable Eye Wash Full Capacity of 55L



SE5000TC

Thermal cover to suit the SE5000 portable unit



SE5050TC

Thermal Covers



SE590A - Portable Eye and Body Wash Full capacity of 45L





SE50P - Portable Eye and Body Wash Full capacity of 9L



SE4764 - Water Preservative Solution - 4 pack 250ml bottles

Multi Spray Units

For the ultimate in Emergency Decontamination, Pratt's Multi-Spray Units provides a high volume fluid flow to provide full body coverage, for fast first aid treatment and decontamination when large volumes of chemicals are involved.

In these types of situations there may be the potential for contamination to the whole of the body. This may involve the storing and handling of dangerous substances such as acid, caustic, toxic and many other types of chemicals or molten materials such as in foundries.

Multi-sprays units are fitted with 16 shower heads for maximum coverage directing the streams of fluid from all directions from head to toe simultaneously. Guaranteed highest quality components, with mainly stainless steel construction for maximum durability and reliability.



SE663P0

Gravity Shower

This unique Pratt gravity fed emergency deluge shower and eyewash unit has been specifically designed for remote mining applications, where no plumbed water is available. The unit is of a heavy duty design which is cyclone rated making it ideal for areas in the northern areas of Australia which are prone to cyclones.

Features include:

- 2500 litre galvanised aquaplate tank.
- Heavy duty steel beam tank support frame.
- Corrugated steel canopy for added tank protection.
- Fluid level indicator.
- Ground level fill point.
- Vertical overhead supply emergency deluge shower . Complete with 200mm AES shower head, stay open ball valve and pull rod assembly.
- Eyewash with stainless steel bowl, hand and foot operated.

Pratt's Gravity Shower is designed to comply with AS4775 as the maximum volume of the tank will ensure a compliant flow rate in excess of the recommended 15 minutes flushing period.



Accessories



PSAL1 Shower Audible & Visual Alarm Kit



PSGL2 Weather Resistant Green Fluoro Light Kit including pole mounting bracket



Thermal Insulating Cover
SE600TCF

Thermal Insulating Foil Cover



SETESTKIT Shower & Eye Wash Test Kit



SETESTTAG Shower & Eyewash Test Tag



SEASV Anti Scald Valve only



SEAS Anti Scald valve (Anti Freeze also available SEAF)



PS3



PS6





Stanchion Sign Mounting Brackets

Emergency Shower Safety Signs

Pratt Safety Systems' Range of Safety Showers & Eye Wash Stations Product Summary Specifications Overview

		Main		Shower	Shower Flow		SS	Bowl Assembly	mbly	Eye Wash	Eye Wash Nozzles	Foot Treadle		Inlet		Recomn	pended
		Construction	-G	Head	Regulator	Valves	'	304.55 3	316 SS Tr	Triple Single	le 304 SS	304 SS	316 SS ^C	Connection	Supply	Minimum Fluid	n Fluid
Model No.	Description	304 SS 316	316 SS P	Plastic 316 SS	90 LPM	25mm	15mm	Yes	Yes Aer	rated Aerat	Aerated Aerated Bulls Horn	Yes	Yes	Size - BSP	Pipe Size	Supply	Pressure
STINITATION	STINIT																
		;		,	:	,	,	,						i d			
SE603	Shower/Eye-face Wash	×		×	×	×	×	×		×				25mm	25mm	135 LPM	210 kPa
SE607	Shower/Eye-face Wash	×		×	×	×	×	×		×		×		25mm	25mm	135 LPM	210 kPa
SE612	Shower/Eye Wash	×		×	×	×	×	×		×		×		25mm	25mm	120 LPM	210 kPa
SE616	Shower/Eye Wash	×		×	×	×	×	×		×				25mm	25mm	120 LPM	210 kPa
SE675	Shower/Eye Wash	×		×	×	×	×			×				25mm	25mm	120 LPM	210 kPa
SE679	Shower/Eye Wash	×		×	×	×	×			×		×		25mm	25mm	120 LPM	210 kPa
SE685	Shower/Eye-face Wash	×		×	×	×	×			×				25mm	25mm	135 LPM	210 kPa
SE689	Shower/Eye-face Wash	×		×	×	×	×			×		×		25mm	25mm	135 LPM	210 kPa
SE620	Shower/Eye Wash	×		×	×	×	×	×			×	×		25mm	25mm	120 LPM	210 kPa
SE607T316	Shower/Eye-face Wash		×	×	×	×	×		×	×			×	25mm	25mm	135 LPM	210 kPa
SE612T316	Shower/Eye - face wash		×	×	×	×	×		×	×			×	25mm	25mm	120 LPM	210 kPa
SHOWERS ONLY	NLY																
SE220	Ceiling Mounted	×		×		×								25mm	25mm	76 LPM	210 kPa
SE227	Wall Mounted	×		×		×								25mm	25mm	76 LPM	210 kPa
SE253	Free Standing	×		×		×								25mm	25mm	76 LPM	210 kPa
EYE & EYE/	EYE & EYE/FACE WASHES ONLY																
SE505	Wall Mounted Eye Wash	×					×	×		×				15mm	15mm	25 LPM	210 kPa
SE515	Wall Mounted Eye Wash	×					×	×		×		×		15mm	15mm	25 LPM	210 kPa
SE545	Pedestal Mounted Eye Wash	×					×	×		×				15mm	15mm	25 LPM	210 kPa
SE546	Pedestal Mounted Eye Wash	×					×	×		×		×		15mm	15mm	25 LPM	210 kPa
SE575	Wall Mounted Eye Wash	×					×			×				15mm	15mm	25 LPM	210 kPa
SE400	Wall Mounted Eye-face Wash	×					×	×		×				15mm	19mm	45 LPM	210 kPa
SE415	Wall Mounted Eye-face Wash	×					×	×		×		×		15mm	19mm	45 LPM	210 kPa
SE420	Pedestal Mounted Eye-face Wash	×					×	×		×				15mm	19mm	45 LPM	210 kPa
SE475	Wall Mounted Eye-face Wash	×					×			×				15mm	19mm	45 LPM	210 kPa
SE480	Pedestal Mounted Eye-face Wash	×					×	×		×		×		15mm	19mm	45 LPM	210 kPa

All Pratt models are designed to exceed the minimum operating requirements of the Standards in order to provide the maximum benefits to the operator when used.
 For the combination models the Recommended Minimum Fluid Supply is required in order for both the shower and eye wash to operate simultaneously.
 For the fluid supply piping other factors may need to be considered, such as: available fluid supply flow rate & pressure, distance of piping, number of emergency equipment connections and other equipment or processes.
 Do not connect to piping smaller than the recommended minimum size as this will affect the flow rate and performance of the emergency equipment.
 Refer to AS4775 for further information, specifications, operating and maintenance requirements.

Combination Shower Spare Parts



Arm



05-1177 Aerator Screen Assembly for Both Single & Triple Head Nozzles



511706 Triple Eye/Face Wash Nozzle Housing



Yellow Plastic Shower Head (with Impeller)



531124 Single Soft Stream Eyewash Nozzle Assembly



Single Aerated Eyewash Nozzle Assembly



Triple Aerated Eye/Face Wash Nozzle Assembly



531120 **Dust Cover Caps for** Single Eye Wash Nozzle Assembly - pk of 2



531113 Dust Cover Cap for Triple Eye/ Face Wash Nozzle Assembly



Strainer Mesh Filter for Flexible Braided Hoses - Pk of 6









Eye & Eye-Face Wash Spare Parts



05-1177 Aerator Screen Assembly for Both Single & Triple Head Nozzles



511706 Triple Eye/Face Wash Nozzle Housing





531018 316 Stainless Steel -15mm Ball Valve

For more information, contact Pratt Safety Customer Service on 1300 133 226 or visit www.prattsafety.com.au



511757 Stainless Steel Metering Screw - Pk of 1



531027 Foot Treadle Assembly





UltraTech Distributor



Pratt Safety Systems is the exclusive distributor for UltraTech International in Australia.

The founders of UltraTech International pioneered the field of spill containment products in the early 1980's. UltraTech was formed in 1993 with one goal in mind: to create the world's finest offering of spill containment and spill response products. Since then, its vision has expanded into additional product categories and the company now features a product line that consists of over 300 unique products.

Pratt Safety Systems is proud to be the exclusive distributor of UltraTech International's comprehensive range of spill containment products.

Wherever chemicals or hazardous substances are being stored, handled or transported, it is essential that all appropriate measures are in place for the containment of these chemicals/substances in the event of spill or leak. Pratt Safety Systems' extensive product range and wealth of experience ensures that we are able to provide our customers with a range of containment solutions to meet any need.

Features and Benefits

Quality of Strength
 Most Ultra Tech products are performance tested and provide a UDL (Uniform Distributed Load) rating. Not all manufacturers offer this level of strength performance specifications.

Quality of Materials

All products moulded from 100% polyethylene plastic material which offers excellent resistance to a wide variety of chemicals.

Compliance Proven

Most products meet a range of stringent USA regulations -SPCC, EPA Container Storage Regulations 40 CFR 264.175 and UFC Spill Containment Regulations, which exceeds any Australian requirements for spill containment.

Safety Yellow

All yellow coloured polyethylene products are made from virgin grade materials for added strength, chemical resistance, long life durability and are easily recognisable.

Slip Resistant

All polyethylene grates incorporate slip resistant, "Diamond Plate" surface design.

Since 1996, UltraTech has been developing Eco-Smart products using up to 100% recycled content. In fact, UltraTech was the first spill containment company to recognise the reduced environmental impact of products made using recycled materials.



Eco-Friendly

Made with up to 100% of recycled resin for environmentally smart and friendly production.

Eco-Nomical

Made with a cost effective method and recycled material for smart savings.

Eco-Logical

Certain load bearing spill containment products may not be safe when using 100% resins. By logically blending the smart amount of virgin resin with recycled resin, UltraTech products offer maximum safety, structural integrity and long life that cannot be achieved by 100% recycled blends.

Throughout the brochure, you will see the Eco-Smart Logo to identify these products. Eco-Smart is also used to designate products that are biodegradable, phosphorus-free, use natural materials or assist in recycling.

Eco-Friendly + Eco-Nomical + Eco-Logical = Eco-Smart



Drum Spill Containment

Standard Drum Spill Pallet

- Built for heavy loads and convenient handling.
- → High load capacity 1360 Kg. Supplied with Drain Plug.
- 100% polyethylene construction compatible with a broad range of chemicals including acids and corrosives.
- ▲ 4 Drum Spill Pallet 1235 has a nestable design which allows multiple pallets to be shipped (or stored) in a minimal amount of space.



Combines high strength and low-profile features while meeting EPA Container Storage Regulations.

- ✓ Nearly 50% lower than standard spill pallets, drum handling is safer and less strenuous.
- ▲ Can be forklifted, all-polyethylene construction.
- ▲ Removable grates feature a non-slip surface.













Drums not included, illustration purpose only

Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)	Optional Ramp	Pull Over Cover
1011	Standard Spill Pallet - 2 Drum	250	1361	737	1347	420	29	-	1016
1235	Standard Spill Pallet - 4 Drum	250	2725	1295	1295	254	36	676	1006
9607	Spill Pallet Plus - 1 Drum	234	363	1010	1010	340	24	678	-
9611	Spill Pallet Plus - 2 Drum	250	2041	1016	1664	222	41	676	1016
9627	Spill Pallet Plus - 3 Drum	250	2041	876	2108	222	41	676	-
9631	Spill Pallet Plus - 4 Drum	284	4082	1575	1575	222	63.5	676	1006

Note: When relocating by a forklift, always remove the loads before moving the spill pallet.

Hard Top Plus

Provides outdoor weather resistant storage for drum/s.

- ▲ Low profile allows for convenient and safe access to either a drum pump or waste funnel, when fitted.
- ✓ Unique dual closure offers significant ergonomic and convenience benefits - drums are easily accessed from either side.
- Roll-top covers can be easily lifted from waist height to access drum tops - no need to reach near ground level.
- Swing-out doors provide safety and convenience for loading or unloading drums.
- ✓ Can be forklifted, lockable, all-polyethylene construction - offers excellent chemical resistance, will not rust or corrode.







9613



9637



Drums and IBC units not included, illustration purpose only



Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)	Optional Ramp	Pull Over Cover
9641	Hard Top Plus - 1 Drum Outdoor Spill Pallet	265	363	915	915	1677	34	-	-
9613	Hard Top Plus - 2 Drum Outdoor Spill Pallet	250	2041	1047	1708	1880	118	676	-
9637	Hard Top Plus - 4 Drum Outdoor Spill Pallet	284	4082	1575	1638	2007	200	676	-
9651	Hard Top Plus - 8 Drum Outdoor Spill Pallet	284	4083	1575	3201	2007	370	676	-
9653	Hard Top Plus - 12 Drum Outdoor Spill Pallet	284	4083	1575	4776	2007	540	676	-

Note: When relocating by a forklift, always remove the loads before moving the spill pallet. All units supplied flat packed.



IBC Spill Pallets

IBC Spill Pallet Plus

Economical and portable containment for IBCs.

- Suitable for intermediate bulk containers (IBCs), drums or other large vessels. All substances stored must be compatible.
- ✓ Inner polyethylene columns feature a dense pattern of vertical ribs to provide superior strength and support for heavy loads. Refer to Uniformly Distributed Loads (UDL) in table.
- ▲ All grates and ribs are easily removed for cleaning.
- 100% polyethylene construction with no metal parts offers excellent chemical resistance and will not rust or corrode. All IBC Spill Pallet Plus will provide years of service under rigorous conditions.
- Optional Shelf Bucket are available for model #1158 & #1144 – catches small leaks or spills during dispensing.
- Double Stack IBC #1058 features superior strength to accommodate two full IBCs.



Provides outdoor weather resistant storage for IBC tank/s.

- Upper roll-top door and lower swing-out doors combine to allow easy and convenient access to IBC.
- ▲ Low profile design provides safe material handling and dispensing.
- ▲ Hard Top models are lockable allows safe material storing; Available to be moved with forklift. 100% polyethylene design will not rust or corrode, provide years of service under rigorous conditions.





1058



1144

Optional Bucket Shelf available #1160





1161

IBC tank not included, illustration purpose only

Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)	Shelf Bucket	Pull Over Cover
1158	IBC Spill Pallet – 1 Tank	1362	3864	1570	1570	660	115	1160	1159
1058	Double Stack IBC Spill Pallet Plus	1514	7273	1492	1492	838	202	-	1159
1144	Twin IBC Spill Pallet Plus	2025	3629 per side	1565	3162	559	205	1160	-
1161	IBC Hard Top – Single Tank Outdoor	1363	3856	1575	1639	2439	239	1160	-
1149	IBC Hard Top – Twin IBC Outdoor	2025	3629 per side	1702	3251	2438	484	1160	-
1125	Modular IBC Spill Pallet – 2 Tank Indoor	1060	4090	1575	4724	222	141	-	-
1126	Modular IBC Spill Pallet – 3 Tank Indoor	1344	4090	1575	6299	222	198	-	-



Unique Modular IBC Spill Pallet – Indoor & Outdoor

- ✓ Indoor and outdoor models available for 2, 3, 4 or 5 tank storage.
- 100% polyethylene construction eliminates the potential of rust and corrosion.
- ▲ Each IBC tank sits on a low-profile spill pallet with a containment capacity of 284L – Expansion Tanks provide 246L of addition capacity.
- "Flow through" bulkhead fittings connect spill pallets and Expansion Tanks together, allowing spills to be channelled throughout the containment systems – containment capacity is thereby "borrowed" from adjacent spill pallets and Expansion Tanks.



- Unique "roll top" enclosures and swing-out doors allow convenient loading and unloading of IBC tanks.
- Compartments are lockable for secure storage of hazardous materials.



1125





Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)	Optional Ramp	Pull Over Cover
1127	Modular IBC Spill Pallet 4 Tank Indoor	1382	4083	1575	7087	222	241	-	-
1128	Modular IBC Spill Pallet 5 Tank Indoor	1419	4083	1575	7874	222	284	-	-
1165	Modular IBC Hard Top Spill Pallet 2 Tank Outdoor	1060	4083	2363	3201	2007	400	-	-
1166	Modular IBC Hard Top Spill Pallet 3 Tank Outdoor	1344	4083	2363	4776	2007	571	-	-
1167	Modular IBC Hard Top Spill Pallet 4 Tank Outdoor	1382	4083	2363	6350	2007	728	-	-
1168	Modular IBC Hard Top Spill Pallet 5 Tank Outdoor	1419	4083	1575	7925	2007	884	-	-

Note: When relocating by a forklift, always remove the load before moving the spill pallet.



Other Spill Products

Spill Decks

Low profile, modular spill decks allow you to design and create a containment system that meets your specific needs.

- Polyethylene construction meets a wide range of chemical compatibility needs
- ✓ Unique diamond plate surface design. Polyethylene grates are slip resistance to reduce slip hazards.
- Applications include hazardous waste collection, storage of chemicals, drum dispensing and battery storage.
- Optional Loading Ramp #1089 provides added drum handling safety and convenience.



Drum Handling, Dispensing and Containment in One Unit.

- ▲ Convenient storage of drum in horizontal position for ease of decanting, whilst providing spillage or leakage containment.
- Open Spillage containment area, providing visual monitoring and ease of access for clean up purposes.
- ✓ For use with 205L drums includes nylon strap to keep drum secure.
- ▲ Large wheels roll easily over shop or factory floors to enable relocation as required, without the need of a forklift.
- ▲ Large capacity of 250L.







1075



1310

Drums not included, illustration purpose only

Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)	Optional Ramp
1321	Modular 1 Drum Spill Deck	42	681	657	657	146	10	1089
1086	Modular 2 Drum Spill Deck	83	1361	657	1321	146	18	1089
1072	Modular 4 Drum Spill Deck	167	2722	1321	1321	146	32	1089
1175	Modular 6 Drum Spill Deck	249	4090	1270	1886	133	39	1089
1075	Modular 8 Drum Spill Deck	284	5454	1270	2502	133	50	1089
1310	Drum Truck	250	273	1835	813	686	54	-
1041	Spill Collector – Pallet Jack Model	250	-	800	800	730	13	-
1040	Spill Collector – Flat Bottom Model	250	-	840	840	730	12	-
0580	Over-pack Drum 360L	360	-	830	830	1050	21	-
0585	Ultra-Overpack Plus – 30G	114	-	581	581	765	7	-
0587	Ultra-Overpack Plus – 20G	76	-	552	552	483	5.5	-

Note: When relocating by a forklift, always remove the load before moving the spill pallet.

1041

Spill Collectors

Spill Collectors

Mobile Secondary Container Provides Maximum Protection For The Inner Drum.

- Applications include satellite waste collections, general storage of chemical drums, and portable drum pumping stations.
- Rugged design allows Flat Bottom Model and Pallet Jack Model to be safety handled by forklift under top flange.







Shown with optional Dolly

Over-Pack Drum

Save Valuable Floor Space

- ✓ New Over-pack 580L is the highest performing poly over-pack on the market!
- → High-density polyethylene construction offers excellent chemical resistance against corrosive substances.
- ✓ Convenient, "no-tools required" closure are perfect for clean-up and spill response activities.



Lab Pack



For more information, contact Pratt Safety Customer Service on 1300 133 226 or visit www.prattsafety.com.au



Spill Trays & Drum Funnels

Burp Free Funnel

- ▲ Burp-Free Funnels features a built-in vent. No more splashing or "burping" when pouring liquids!
- ▲ Threaded brass insert screws into 5cm drum bung or tank cap.
- ▲ Hinged, lockable lid prevents unauthorised access.





Containment Tray

Versatile secondary containment for small containers and packages.

- ▲ Low profile, 62L sump is perfect for containment of 20L pails, batteries, safety cans, dry cleaning waste drums, and leaky machine parts.
- ▲ Optional grating elevates containers from spilled liquid – features 52L capacity with grating.



2351

Octagon Drum Tray

- Designed to collect and obtain drips and overflows associated with filling of 205L and 60L drums.
- Optional bottom elevates drums 6.6cm and out of spilled liquid.





IBC tank, Drums and cans not included, illustration purpose only

Part No.	Description	Sump (L)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
651	Burp Free Funnel with Lockable Lid (Standard)	-	340	340	279	2.5
656	Burp Free Funnel with Lockable Lid (Large)	-	559	559	292	3.5
2351	Yellow without Grating	62	1372	756	89	7.5
2352	Yellow with Grating	53	1372	756	89	15
2350	Black with Grating	53	1372	756	89	15
1045	Drum Tray (no grate)	86	689	813	206	9
1046	Drum Tray (with grate)	80	689	813	206	12

Bung Access Funnel

- The Ultra-Bung Access Funnel allows access to the 22.86mm drum bung.
- ✓ Unique zig-zag channelled surface diffuses splashing. Level surfaces allow filters, paint cans, buckets and bottles to remain upright while draining passively.
- Optional hinged cover keeps dirt and unwanted materials out of your waste stream. It's also lockable for secure drum management.






484

Pop Up Fill Gauge

- Installation of our Pop-Up Fill Gauge in the bung allows visual monitoring of waste level in the drum and helps you plan ahead for drum removal.
- ▲ It also eliminates the mess caused by overfilling.



Pop Up Fill Gauge for Global & Bung Access Funnels





499

Global Funnel

- Securely fits nearly every 205L tight head steel or polyethylene drum manufactured throughout the world.
- Uniquely bottom designed fits tightly on drums with varying diameters – no more wobbles or drips!

IBC tank, Drums and cans not included, illustration purpose only

Part No.	Description	Sump (L)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
482	Bung Access Funnel with Spout	23	600	600	140	4.5
484	Bung Access Funnel with Spout& Hinged Cover	23	679	737	241	7.5
497	Global Funnel with Spout	19	711	711	229	5.5
499	Global Funnel with Spout & Hinged Cover	19	737	737	280	7.5

Utility Spill Trays

Black Utility Trays

Keep messy drips and spills off warehouse and factory floors.

- ▲ Heavy-duty polyethylene construction will not rust or corrode.
- → Ribbed bottom keeps cans, pails and other containers elevated above small spills or leaks.
- ▲ Nestable for easy storage when not in use.



Lab Trays

Countertop spill collection trays safely store bottles, beakers and other lab wares.

- Assists decanting of small quantity liquids safer, cleaner, and more manageable.
- ✓ Features built-in pouring spout to conveniently remove spills.
- Designed for use in research, laboratory, medical, and industrial facilities.



Drums and cans not included, illustration purpose only

Part No.	Description	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
1031	Black Utility Tray - 45L	305	1219	121	3.5
1032	Black Utility Tray - 91L	610	1219	121	5
1033	Black Utility Tray - 113L	762	1219	121	5.5
1034	Black Utility Tray - 68L	610	914	121	3.5
1035	Black Utility Tray - 102L	914	914	121	5
1036	Black Utility Tray - 113L	1016	1219	89	6.5
1060	Laboratory Bench Top Tray - 6.5L	305	432	102	2.5
1061	Laboratory Bench Top Tray - 11L	432	533	102	2.5

Flexible Utility Trays

Convenient, compact, and foldable trays capture small leaks and spills.

- ✓ One-piece units no components or pieces to lose.
- High visibility, PVC fabric provides rugged durability and excellent chemical compatibility.
- Utility tie provides easy and convenient storage and portability.







Drum Rack Systems

Drum Rack

Polyethylene drum racks capture spills to keep your workplace clean and safe.

- ▲ All drum rack models tilt the drum slightly forward allowing maximum drainage – optimise your use of chemicals while minimising waste.
- ✓ Improves worker safety by keeping slippery chemicals and oils off the plant floor.






Part No.	Description	Sump (L)	UDL (Kg)	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
1335	Flexible Utility Tray - 6L	-	-	305	305	121	0.5
1330	Flexible Utility Tray - 19L	-	-	457	457	121	0.5
1331	Flexible Utility Tray - 25L	-	-	610	610	121	0.9
1332	Flexible Utility Tray - 34L	-	-	762	762	121	1
1333	Flexible Utility Tray - 64L	-	-	1067	1067	121	1.5
1334	Flexible Utility Tray - 76L	-	-	1219	1219	121	2
2384	2 Drum Rack Containment System	250	682	1347	1347	1137	62.5
2381	4 Drum Rack Containment System	250	1361	1347	1347	1975	90

Drain Seals & Plugs

Drain Seals

Stop Spills From Going Down The Drain

- Reinforcing mesh is "sandwiched" between layers of polyurethane – increases durability and resistance to tearing.
- ✓ Urethane construction allows the pad to deform and seal off most drains - temporarily "seals" to any smooth surface. No specified "top" or "bottom", both sides will quickly seal drains.





Flexible Polyurethane plugs prevents contaminants from entering drains.

- Rigorous resistance against oil, water and most aggressive chemicals.
- Eyebolts are removable, allowing installation of grating Drain Plug in place.
- ▲ Non-absorbing material, easily cleaned for repeated use. Available in safety orange colour.



2124 - 2125



2160 - 2167



2126 - 2132



2134 - 2137



2113 - 2117

Part No.	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
2124	1450	450	10	7
2125	1450	900	10	12
2126	458	458	10	2.5
2127	610	610	10	3.5
2130	915	915	10	9
2132	1220	1220	10	17
2134	305	305	10	1.5
2135	508	508	10	3
3136	762	762	10	5

Part No.	Depth (mm)	Width (mm)	Height (mm)	Weight (Kg)
2137	1067	1067	10	9
2160	915	915	10	10.5
2162	1220	1220	10	19.5
2166	458	458	10	3
2167	610	610	10	7
2113	50	50	-	1
2114	75	75	-	1
2115	100	100	-	1.5
2117	150	150	-	3

Accessories



1159 Optional Pullover Cover for Single IBC Spill Pallet model #1158.




1006 Optional Pullover Cover for 4 Drum Pallets. Suitable for both Standard and Plus models #1235 and #9631.



1016 Optional Pullover Cover for 2 Drum Pallets. Suitable for both Standard and Plus models #1011 and #9611.









409 Drum Lifter - Securely grips 209L steel drums when loading and unloading salvage drums, Rugged, all-steel construction, Load capacity: 455 KG.

Part No.	Description	Sump (L)	UDL (Kg)	Depth* (mm)	Width* (mm)	Height* (mm)	Weight (Kg)
676	Spill Pallet Ramp	-	318	1410	724	222	19.5
678	Spill Pallet Ramp	-	318	1740	724	305	34
1089	Spill Deck Ramp	-	272	610	813	146	8
1006	4 Drum Pullover Cover	-	-	610	305	204	3.5
1016	2 Drum Pullover Cover	-	-	610	305	204	3.5
1159	IBC Pullover Cover	-	-	610	305	204	5
401	Response Shovel – Aluminium Scoop	19	-	-	-	737	1
402	Response Shovel – Aluminium Scoop, Telescoping Shaft	19	-	-	-	991	1
404	Response Shovel – Polyethylene Scoop	19	-	-	-	970	1
409	Drum Lifter	-	445	-	-	-	9

Ultra Sidewinder

Protects cords & cables and avoids dangerous tripping hazards

Articulating Pratt pieces offer exclusive flexible design - curves, corners and s-curves are easily made while maintaining a completely flat profile.

Modular design makes it easy to reconfigure and replace targeted segments, even while the cable remains connected.

Simple installation - no tools required. Fully customisable length.



For more information, contact Pratt Safety Customer Service on 1300 133 226 or visit www.prattsafety.com.au

Large




Extension Cords 9.5mm

8 Air Hoses 19mm

8 Garden Hoses 16mm

MULT. Large Industrial Cables 16mm - 38mm




Large - 1840				
Load Capacity	18.3kg / cm²			
Load Capacity per axle	6123 kg			
1 metre system	1067 mm x 346 mm x 54 mm			
Weight	6.0 kg			
Internal Channel Opening	76 mm x 38 mm			
*6 tonne load rating				



Medium



Small

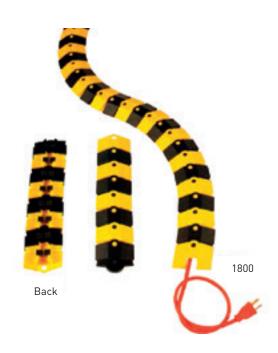


Extension Cords 9.5mm


Air Hoses 19mm

Garden Hoses 16mm



Extension Cords 9.5mm





Medium - 1830					
Load Capacity	18.3kg / cm²				
Load Capacity per axle	6123 kg				
1 metre system	1067 mm x 248 mm x 35 mm				
Weight	2.7 kg				
Internal Channel Opening	76 mm x 19 mm				
*6 tonne load rating					

Small 1800 - 1 metre system with end caps Small 1801 - 300mm Extension Small 1820 - 7.4m system with End caps					
Load Capacity	140.6 kg/cm²				
Load Capacity per axle	14 515 kg				
Weight	0.7 kg				
Internal Channel Opening	19 mm x 9.5 mm				

Smoke Stops

Smoke Stops receptacles keep areas clear of cigarette butts

- ▲ Polyethylene construction will not rust or corrode.
- ✓ Design minimises smoke exit and water entry.
- ▲ Large capacity up to 15 litres, steel pail holds over 3000 cigarette butts easily removed, cleaned and replaced.







Model	Description	Height (mm)	Width (mm)	Weight (Kg)
1532	Classic (Beige)	1041	356	4.5
1533	Classic (Grey)	1041	356	4.5
1546	Classic (Black)	1041	356	4.5

A better looking butt can

Encourage proper disposal of cigarette butts, keeping sidewalks and entrances clear of unsightly cigarette butts. Maintain your property and eliminate health risks.

Use Smoke Stops at:

- ▲ Factory/ Office Entrances and Break Areas.
- ▲ Construction Sites
- Poolsides
- ▲ Restaurant Entrances and Patios
- ▲ Parks and Picnic Areas
- ▲ Sports Fields
- Golf Courses













Distributed by:

Other Pratt Products/Services:

- Dangerous Goods Storage Cabinets
- Emergency Showers & Eye Wash Stations
- Spill Containment
- Gas Cylinder & Aerosol Storage Cages
- ✓ Facility Protection
- Site Safety

For more information call 1300 133 226.

